


DRY CONTACT INPUT TRACK MOUNT RELAYS


RIBM01ZNDC

Dry Contact Relay, 30 Amp DPDT, Class 2 Dry Contact Input, 120 Vac Power Input, 4.00" Track Mount

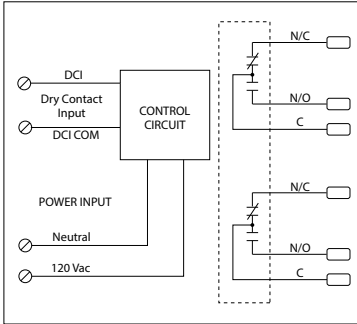

RIBM02ZNDC

Dry Contact Relay, 30 Amp DPDT, Class 2 Dry Contact Input, 208-277 Vac Power Input, 4.00" Track Mount

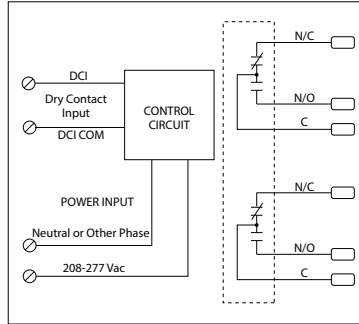

RELAYS

SPECIFICATIONS

- # Relays & Contact Type: One (1) DPDT Continuous Duty Coil
- Expected Relay Life: 10 million cycles minimum mechanical
- Operating Temperature: -30 to 140° F
- Humidity Range: 5 to 95% (noncondensing)
- Operate Time: 18ms
- Relay Status: Red LED On = Activated
- Power Status: Green LED On = Activated
- Dimensions: 2.88"H x 4.00"W x 1.50"D1/2.00"D2
- Housing Detail: See **Housing H** in housing guide for dimensions
- Origin: Made of US and non-US parts
- Track Mount: 4.000"
- Approvals: UL Component Recognized, UL916
C-UL, CE, RoHS
- Gold Flash: Yes
- Override Switch: No

Contact Ratings:

30 Amp Resistive @ 300 Vac
25 Amp Resistive @ 28 Vdc
15 Amp Resistive @ 600 Vac
3 HP @ 480-600 Vac
2 HP @ 240/277 Vac
1 HP @ 120 Vac
20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast

770 VA @ 120 Vac
1158 VA @ 240 Vac
1109 VA @ 277 Vac
1640 VA @ 480 Vac
NEMA B600 Pilot Duty

Power Input:

95 mA @ 120 Vac (RIBM01ZNDC)
95 mA @ 208-277 Vac (RIBM01ZNDC)


Notes:

- **Dry Contact Input Operation:**
Close dry contact to activate relay.
- If more than one dry contact input RIB shares a single dry contact input, DCI COM must be common.

DRY CONTACT INPUT TRACK MOUNT RELAY

RIBM013PNDC

Dry Contact Relay, 30 Amp 3PDT, Class 2 Dry Contact Input, 120 Vac Power Input, 4.00" Track Mount

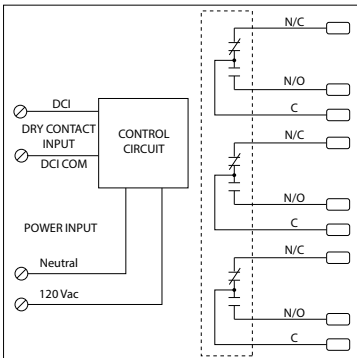

SPECIFICATIONS

- # Relays & Contact Type: One (1) 3PDT Continuous Duty Coil
- Expected Relay Life: 10 million cycles minimum mechanical
- Operating Temperature: -30 to 140° F
- Humidity Range: 5 to 95% (noncondensing)
- Operate Time: 20ms
- Relay Status: Red LED On = Activated
- Power Status: Green LED On = Activated
- Dimensions: 2.88"H x 4.00"W x 1.50"D1/2.00"D2
- Housing Detail: See **Housing H** in housing guide for dimensions
- Origin: Made of US and non-US parts
- Track Mount: 4.000"
- Approvals: UL Component Recognized, UL916
C-UL, CE, RoHS
- Gold Flash: No
- Override Switch: No

Contact Ratings:

30 Amp Resistive @ 300 Vac
30 Amp Resistive @ 28 Vdc
15 Amp Resistive @ 600 Vac
7.5 HP @ 480 Vac, 3 Phase
5 HP @ 240 Vac, 3 Phase
3 HP @ 480-600 Vac, 1 Phase
2 HP @ 240/277 Vac, 1 Phase
1 HP @ 120 Vac, 1Phase
20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast

Heavy Pilot Duty
770 VA @ 120 Vac, 1 Phase
1158 VA @ 240 Vac, 1 Phase
1109 VA @ 277 Vac, 1 Phase
1640 VA @ 480 Vac, 1 Phase
1466 VA @ 240 Vac, 3 Phase
2122 VA @ 480 Vac, 3 Phase

Power Input:

95 mA @ 120 Vac

Notes:

- **Dry Contact Input Operation:**
Close dry contact to activate relay.
- If more than one dry contact input RIB shares a single dry contact input, DCI COM must be common.