



## AC POWER SUPPLIES: 120 VAC TO 24 VAC

### PSB40AB10

Single 40 VA Power Supply, 120 Vac to 24 Vac, 10 Amp Main Breaker, Open Bracket Panel Mount



\* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

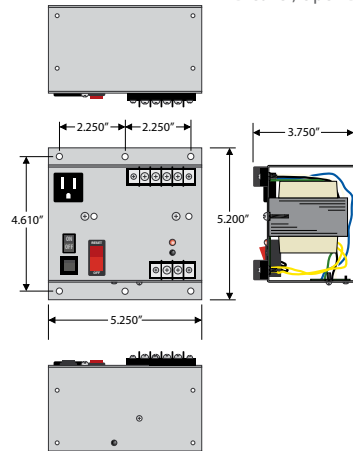

### PSB100AB10

Single 100 VA Power Supply, 120 Vac to 24 Vac, 10 Amp Main Breaker, Open Bracket Panel Mount



POWER  
SUPPLIES

REMOVABLE TERMINAL COVER PROVIDED

## SPECIFICATIONS

**Transformer:** One 40 VA Split-Bobbin (PSB40AB10)  
One 100 VA Split-Bobbin (PSB100AB10)

**Primary:** 120 Vac

**Secondary:** 24 Vac, w/ LED Indicator

**Frequency:** 50/60 Hz

**Over Current Protection:** Inherently Limited + Circuit Breaker (PSB40AB10)  
Circuit Breaker (PSB100AB10)

**24 Vac ON/OFF:** On / Off Switch

**Main Breaker ON/OFF:** Switch / Breaker (10 Amp)  
(Kills power to entire unit:  
Outlets, Aux. Output, & Transformer)\*  
Total Combined Output 9A

**Mounting:** Panel mount

**Max. Ambient Temperature:** 40° C

**Approvals:** Class 2 (UL Approved UL5085-3),  
UL916, UL508, C-UL, CE, RoHS


**Dimensions:** 5.200" H x 5.250" W x 3.750" D

**Origin:** Made of US and non-US parts


## AC POWER SUPPLIES: 120 VAC TO 24 VAC

### PSC40AB10

Single 40 VA Power Supply, 120 Vac to 24 Vac, 10 Amp Main Breaker, Metal Enclosure



\* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

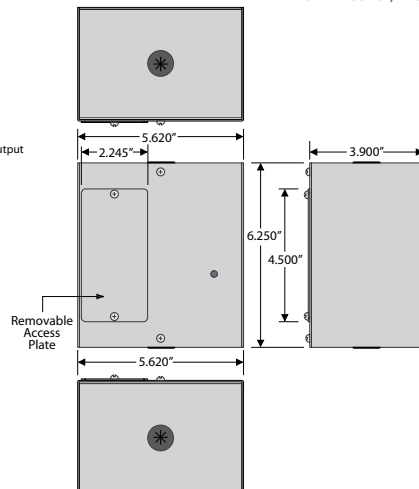

### PSC100AB10

Single 100 VA Power Supply, 120 Vac to 24 Vac, 10 Amp Main Breaker, Metal Enclosure



Shown Without Cover



Shown With Cover



## SPECIFICATIONS

**Transformer:** One 40 VA Split-Bobbin,  
Inherently Limited (PSC100AB10)  
One 100 VA Split-Bobbin, Circuit  
Breaker (PSC100AB10)

**Primary:** 120 Vac

**Secondary:** 24 Vac, w/ LED Indicator

**Frequency:** 50/60 Hz

**24 Vac ON/OFF:** On / Off Switch & Breaker

**Main Breaker ON/OFF:** Switch / Breaker (10 Amp)  
(Kills power to entire unit: Outlets,  
Aux. Output, & Transformer)\*  
Total Combined Output 9A

**Mounting:** Mounting plate included (as shown)

**Max. Ambient Temperature:** 40° C

**Approvals:** Class 2 (UL Approved UL5085-3), UL916,  
C-UL, CE, RoHS

**Dimensions:** 6.250" H x 5.620" W x 3.900" D

**Origin:** Made of US and non-US parts

### Notes:

- To order without enclosure, see PSB40AB10
- To order without enclosure, see PSB100AB10.