


AC POWER SUPPLIES

PSH40AB10-EXT2

Single 40 VA Power Supply, 120 Vac to 24 Vac, UL Class 2, 10 Amp Main Breaker with Extension Cord, Metal Enclosure

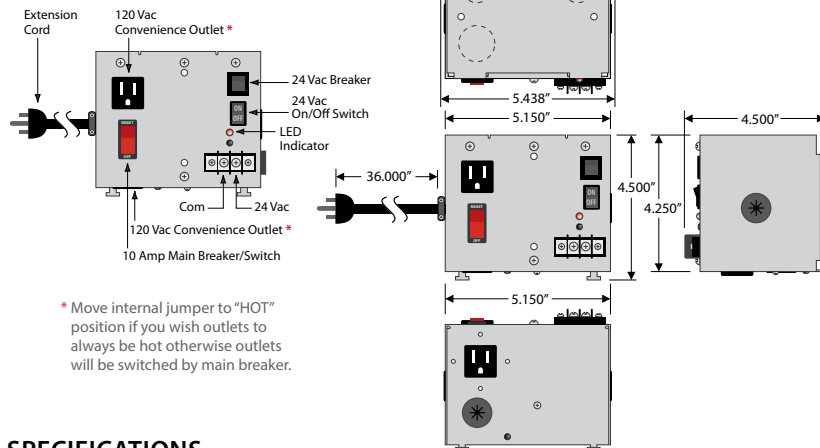

* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

PSH100AB10-EXT2

Single 100 VA, 120 Vac to 24 Vac, UL Class 2, 10 Amp main breaker with input extension cord, Metal Enclosure



PLUGS DIRECTLY INTO WIRED OUTLET BOX FOR USE ABOVE FALSE CEILINGS OR IN CONTROL PANELS

SPECIFICATIONS

Transformer: One 40 VA (PSH40A10-EXT2)
One 100 VA (PSH100A10-EXT2)

Over Current Protection: Circuit Breaker

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A

Max. Ambient Temperature: 40° C

Approvals: Class 2 (UL Approved UL5085-3),
UL916, C-UL, CE, RoHS

Dimensions: 4.500" H x 5.438" W x 4.500" D

Origin: Made of US and non-US parts

Input Wires: Powercord
BLK: 120 Vac
WHT: Neutral
GRN: Ground

Notes:


- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.

Output Wire: Auxiliary Load Output
BLU: 120 Vac
9 Amp, max.

AC POWER SUPPLIES

PSH75A Series

Single 75 VA Power Supply Multi-tap 480/277/240/208/120 to 24 Vac, UL Class 2, Metal Enclosure

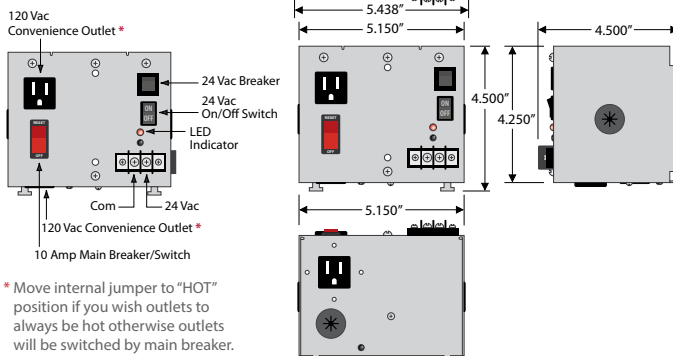

* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.



PSH75A SERIES SELECTION GUIDE

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH75A	•			External Terminal Strip
PSH75AW	•			Internal Wires
PSH75AB10*	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH75AWB10*	•	•	10 Amp Switch / Breaker	Internal Wires

SPECIFICATIONS

Transformer: One 75 VA Split-Bobbin

Over Current Protection: Circuit Breaker

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A

Approvals: Class 2 (UL Approved UL5085-3),
UL916, C-UL, CE, RoHS, Special
▲ Seismic Certification of Equipment and Components: OSP-0201-10

Dimensions: 4.500" H x 5.438" W x 4.500" D

Origin: Made of US and non-US parts

Input Wires: "B10" Models Only

Input Power Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Outlet Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Output Wires: "B10" Models Only

Auxiliary Output

BLU: 120 Vac

All Other Models

Primary Wires**

GRY: 480 Vac

BRN: 277 Vac

ORG: 240 Vac

RED: 208 Vac

WHT: 120 Vac

BLK: Common

"W" Models Only

Transformer Output

WHT/YEL: 24 Vac

WHT/BLU: Common

Notes:

- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
- Design is in accordance with ASCE 7-05 Chapter 13: ▲
<https://hcai.ca.gov/wp-content/uploads/2020/10/OSP-0201.pdf>
- Consult factory for OSP labeling