


DC POWER SUPPLIES: 24 VAC TO 1.5 - 28 VDC


PSMN24DA

DC Power Supply, Non-Isolated Linear, 24 Vac to 1.5-28 Vdc, 300mA Adjustable Output, 2.75" Track Mount

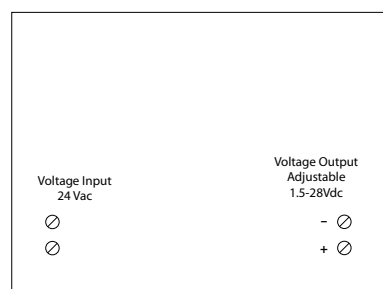

PSMN24DAS

DC Power Supply, Non-Isolated Linear, 24 Vac to 1.5-28 Vdc, 300mA Adjustable Output, Switch, 2.75" Track Mount

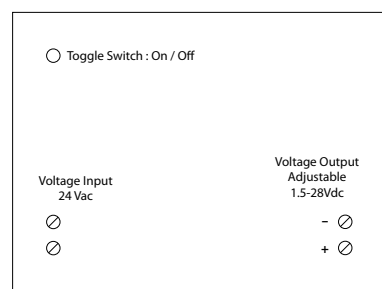

SPECIFICATIONS

Voltage Input: 24 Vac, full-wave rectified
Voltage Output: 1.5 - 28 Vdc **non-isolated**
Frequency: 50/60 Hz
Overload Protection: Electrical and Thermal, Auto-Reset
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Power Status: LED On = Activated
Dimensions: 1.75"H x 2.75"W x 1.25"D1/1.75"D2
Housing Detail: See **Housing H** in housing guide for dimensions
Origin: Made of US and non-US parts
Track Mount: 2.750"
 MT212-2 Mounting Track Supplied
ON/OFF Switch: None (PSMN24DA)
 2 Position Toggle (PSMN24DAS)
Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS

Output Current Ratings:
 116 mA @ 10 Vdc
 125 mA @ 12 Vdc
 300 mA @ 24 Vdc

Input Current Rating:
 550 mA Maximum

Percent Ripple:
 0.0016%, 24 Vdc @ 300 mA

Regulation:
 Load: 0.04% No Load to Full Load
 Line: 0.0125 V/V


Notes:

- Requires a separate ungrounded transformer when used in conjunction with 1/2 wave rectified power supplies, grounded 24 Vac transformers, or when 24 Vac and 24 Vdc are connected in common.

DC POWER SUPPLY: 24 VAC TO 1.5 - 14 VDC

PSM20A12DAS

DC Power Supply, Isolated Linear, 24 Vac to 1.5Vdc-14Vdc, 300mA Adjustable Output, Track Mount

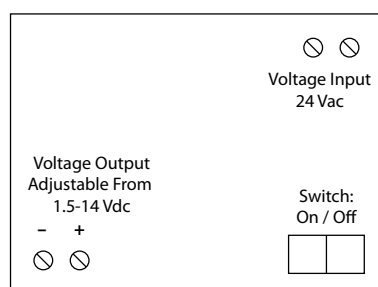

SPECIFICATIONS

Voltage Input: 24 Vac
Voltage Output: 1.5 - 14 Vdc Isolated
Frequency: 50/60 Hz
Overload Protection: Electrical and Thermal, Auto-Reset
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Power Status: LED On = Activated
Dimensions: 2.75"H x 4.00"W x 1.75"D1/2.25"D2
Housing Detail: See **Housing H** in housing guide for dimensions
Origin: Made of US and non-US parts
Track Mount: 4.000" and 2.750"
 MT212-4 Mounting Track Supplied
ON/OFF Switch: 2 Position
Approvals: Class 2, UL916, C-UL, CE, RoHS,

Output Current Ratings:
 300 mA @ 12 Vdc

Input Current Rating:
 950 mA Maximum

Percent Ripple:
 0.0016%, 12 Vdc @ 300 mA

Regulation:
 Load: 0.04% No Load to Full Load
 Line: 0.0080 mV/V