


DC POWER SUPPLIES: 24 VAC TO 1.5 - 28 VDC


PSM24A24DAS

DC Power Supply, Isolated Linear, 24 Vac to 1.5-28 Vdc, 300mA Adjustable Output, Track Mount

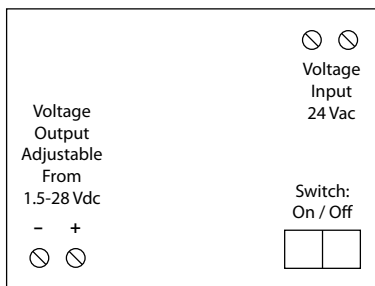

PSM19A24DAS

DC Power Supply, Isolated Linear, 120 Vac to 1.5-28 Vdc, 300mA Adjustable Output, Track Mount

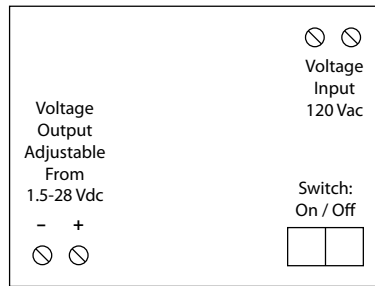

POWER
SUPPLIES

SPECIFICATIONS

Voltage Input: 24 Vac (PSM24A24DAS)
120 Vac (PSM19A24DAS)
Voltage Output: 1.5 - 28 Vdc Isolated
Frequency: 50/60 Hz
Overload Protection: Electrical and Thermal, Auto-Reset
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Power Status: LED On = Activated
Dimensions: 2.75"H x 4.00"W x 1.75"D1/2.25"D2
Housing Detail: See **Housing H** in housing guide for dimensions
Origin: Made of US and non-US parts
Track Mount: 4.000" and 2.750"
MT212-4 Mounting Track Supplied
ON/OFF Switch: 2 Position
Max. Ambient Temperature: 40° C (PSM19A24DAS)
Approvals: Class 2, UL916, C-UL, CE, RoHS,

Output Current Ratings:

116 mA @ 10 Vdc
125 mA @ 12 Vdc
300 mA @ 24 Vdc

Input Current Rating:

950 mA Maximum (PSM24A24DAS)
150 mA Maximum (PSM19A24DAS)

Percent Ripple:

0.0016%, 24 Vdc @ 300 mA


Regulation:

Load: 0.04% No Load to Full Load
Line: 0.0080 mV/V (PSM24A24DAS)
Line: 0.6250 mV/V (PSM19A24DAS)

DC POWER SUPPLY: 120 VAC TO 24 VDC

PSMN40A24DS

DC Power Supply, Isolated Linear, 120 Vac to 24 Vdc, 1 Amp Output, 2.75" Track Mount

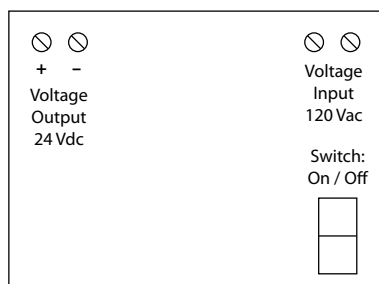

SPECIFICATIONS

Voltage Input: 120 Vac
Voltage Output: 24 Vdc Isolated
Frequency: 50/60 Hz
Overload Protection: Electrical and Thermal, Auto-Reset
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Power Status: LED On = Activated
Dimensions: 5.00"H x 2.75"W x 2.00"D1/2.50"D2
Housing Detail: See **Housing H** in housing guide for dimensions
Origin: Made of US and non-US parts
Track Mount: 2.750"
MT212-6 Mounting Track Supplied
ON/OFF Switch: 2 Position
Max. Ambient Temperature: 40° C
Approvals: Class 2, UL916, C-UL, CE, RoHS,

Output Current Ratings:

1 A @ 24 Vdc

Input Current Rating:

400 mA Maximum

Percent Ripple:

0.0016%, 24 Vdc @ 1 A

Regulation:

Load: 0.50% No Load to Full Load
Line: 25.0000 mV/V