


RIBMW24B-44-BC

BACnet MS/TP Network Relay Device, Four Binary Outputs + Override,
Four Binary Inputs, 24 Vac/dc Power Input, 4.00" Track Mount

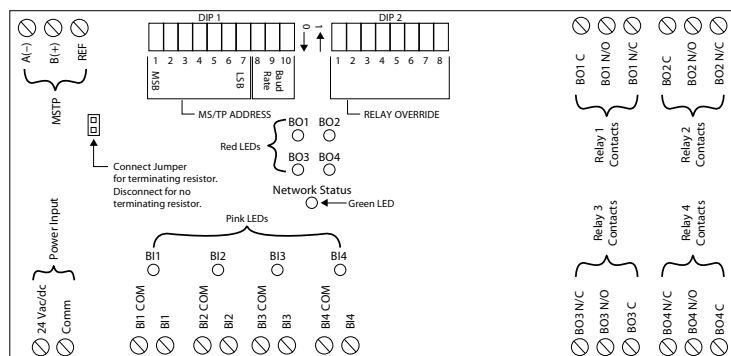

SPECIFICATIONS

Relays & Contact Type: Four (4) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Network Communication: Green LED
Relay Status: Red LED On = Activated
Binary Input Status: Pink LED On = Activated
Dimensions: 6.00"H x 4.00"W x 0.88"D1/1.38"D2
Housing Detail: See **Housing H** in housing guide for dimensions
Origin: Made of US and non-US parts
Track Mount: MT4-6 Mounting Track Provided
Approvals: UL Listed, UL916, C-UL, CE, RoHS, BTL Certified
Gold Flash: No
Relay Override Switch: DIP Switch Control

Network Media: Twisted Pair 22-24AWG, shielded recommended

Terminations: Functional Devices product installed at both ends of the MS/TP network – Use 120 Ω end of line resistors. All other cases – Follow instructions from the device installed at the end of the MS/TP network.

Polarity: Network is polarity sensitive

Baud Rate: 9600, 19200, 38400, 57600, 76800, 115200 (Dip Switch Selectable)

Contact Ratings:

20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 120/277 Vac
 16 Amp Electronic Ballast @ 277 Vac (N/O)
 10 Amp Tungsten @ 120 Vac (N/O)
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Power Input Ratings:

24 Vac : 400 mA
 24 Vdc : 190 mA

BACnet® Details:

- MS/TP Address & Baud Rate must be set prior to power up via DIP switches.
- Device ID will default to 277XXX where XXX is the MS/TP Address. Examples:

MS/TP Address - 004
 Device ID - 277004

MS/TP Address - 121
 Device ID - 277121

- Device ID can be changed via network command. Once changed, it will no longer default to 277XXX. (MS/TP Address & Device ID must be unique)
- This model utilizes: BO1, BO2, BO3, BO4, (Relay outputs), BI1, BI2, BI3, BI4 (Dry contact inputs)
- Device Instance changed via Object Identifier Property of Device Object
- Each unit is 1/8 unit load
- PIC Statement available on website.

DIP 1				
DIP Switches				Baud Rate
1-7	8	9	10	
See Bulletin B1082 for full MS/TP Addressing	0	0	0	9600
	0	0	1	19200
	0	1	0	38400
	0	1	1	57600
	1	0	0	76800
	1	0	1	115200

All other combinations=9600 baud

- Dry contact digital input is a general purpose input that is not tied to the relay internally. Can be used with any dry contact switching device, such as a current sensor, to report back to the network.

DIP 2									
Relay	Relay State**	DIP Switches*							
		1	2	3	4	5	6	7	8
BO1	Auto	1	X	X	X	0	X	X	X
	ON	X	X	X	X	1	X	X	X
	OFF	0	X	X	X	0	X	X	X
BO2	Auto	X	1	X	X	X	0	X	X
	ON	X	X	X	X	X	1	X	X
	OFF	X	0	X	X	X	0	X	X
BO3	Auto	X	X	1	X	X	X	0	X
	ON	X	X	X	X	X	X	1	X
	OFF	X	X	0	X	X	X	0	X
BO4	Auto	X	X	X	1	X	X	X	0
	ON	X	X	X	X	X	X	X	1
	OFF	X	X	X	0	X	X	X	0

* 0 = Open ; 1 = Closed

** Device must be powered for override