


10 AMP PILOT CONTROL RELAY

RIBD2421C

Time Delay Pilot Relay, 10 Amp SPDT,
24 Vac/dc/120-277 Vac Coil, NEMA 1 Housing

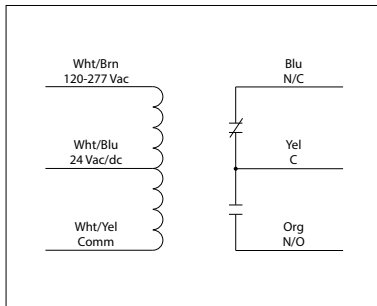

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 6ms after time delay
Relay Status: RED LED On = Activated
Time Delay Status: PINK LED FLASHING = Timing
Timing Mode: Delay On Make (N/O)
Timing Range: 6 seconds - 20 minutes
Timing Adjustment: 4 position DIP switch for range selection and single turn potentiometer for timing adjustment within range
Timing Tolerance: Switches 1 & 2 = $\pm 10\%$
Switches 3 & 4 = $\pm 5\%$
Timing Repeatability: $\pm 1\%$
Temperature Timing Variance: $\pm 1\%$
Voltage Timing Variance: $\pm 1\%$
Recycle Time: 750ms Maximum
Dimensions: 4.00"H x 4.00"W x 1.81"D with 0.50"NPT nipple
Housing Detail: See **Housing C** in housing guide for dimensions
Origin: Made of US and non-US parts
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:

10 Amp General Use @ 277 Vac
10 Amp Resistive @ 30 Vdc (N/O)
7 Amp Resistive @ 30 Vdc (N/C)
1/2 HP @ 125 Vac
1 HP @ 250 Vac
1/4 HP @ 277 Vac
C300 Pilot Duty

Input Current:


66 mA @ 24 Vac
38 mA @ 24 Vdc
40 mA @ 120-277 Vac

Coil Voltage Input:


24 Vac/dc ; 120-277 Vac ; 50-60 Hz
Drop Out = 3 Vac / 3.8 Vdc
Pull In = 20 Vac / 20 Vdc



Timing Adjustment



Range Selection




Only Close
1 Switch

← Depressed for closed
← Depressed for open

TIMING TABLE

Switch Ranges	Close Dip Switch	Potentiometer Setting				
		A	B	C	D	E
6s-20s	1	6s	9s	13s	16s	20s
22s-1min15s	2	22s	36s	50s	1min4s	1min15s
1min30s-5min	3	1min30s	2min10s	3min20s	4min16s	5min
6min-20min	4	6min	9min	13min20s	17min20s	20min

Timing Diagram

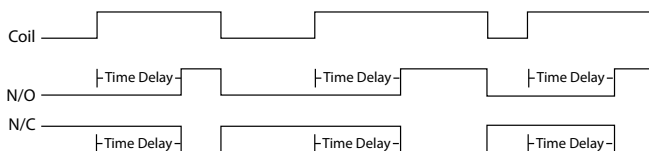

Time Delay Application

Load 2 stays on selected amount of time after Load 1 goes off.

