

Fresh Air Ventilation Kit


iO-FAV-o6
iO-FAV-o8

The Fresh Air Ventilation system is designed to introduce fresh air into a home through an intake damper controlled by a micro-processor logic panel. The iO-FAV has single adjustment setup, exhaust fan control option, outdoor temperature and/or humidity limit option and damper override capabilities. It is easy to install and meets ASHRAE Standard 62.2. The iO-FAV kit comes with a control panel, 20VA transformer and 6" or 8" round damper. The control panel is available separately (iO-FAVPAN) and can be ordered with additional size dampers.

Features and Benefits:

- Micro-controller logic panel
- Status LEDs
- Single adjustment setup
- "Damper Closed" override switch
- Meets ASHRAE Standard 62.2
- Exhaust fan control options
- Remote damper override options
- Outdoor temperature and humidity override option
- Optional On Demand CO₂ gas detection

Warranty: 5 years

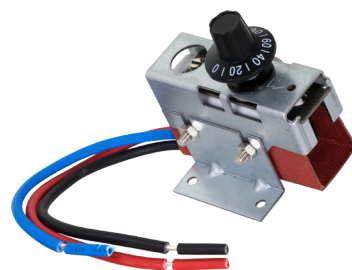

Outdoor Thermostat
iO-ODT sold separately

Specifications:

Mounting	Aluminum back plate with mounting holes
Panel Dimensions	8.00" Height x 6.00" Width x 1.50" Depth
Coverage	1,500 – 4,000 ft ²
Adjustable Ventilation Schedule	1 – 60 minutes
Ventilation CFM Range	40 – 150 CFM
Power Requirement	24VAC
Damper Requirement	24VAC, 10VA, power open/spring close actuator